


# INSTRUCTIONS

Please read each step before you attempt to set up.  
Save these instructions for future reference.


- Embassy™ II Aluma-Steel Frame
- 4 Zippered *Dura Lon*™ Sidewalls
- *Dura Last*™ Commercial Top
- Roller Bag
- Awning Fabric
- Name Banner Fabric
- 2 Awning Poles
- 4 Piece Stake Kit

## \*Note: First Time Attachment Is Required.


Top and frame are packed separately. A first time set up requires that top be bolted on to the frame. This first time set up takes longer than future set ups. Once top is permanently attached to frame, it does not need to be removed and set up and take down are easily accomplished within seconds.

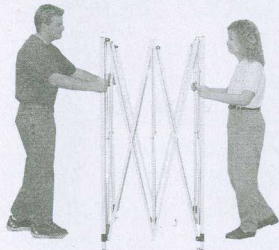


**1.** Place your E-Z UP® frame in the center of area to be sheltered. With partner on opposite side, grasp two outer legs, slightly lift off ground and step backwards, stopping at full arms' length - approximately 3/4 its total size.




**\*2.** Gently unfold the fabric top and place it over the open frame.

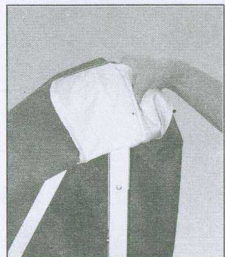


**\*3.** Attach the top to the E-Z UP® frame by matching hook & loop strips on the top with the hook & loop strips on the frame. Pull the corners down fully. Push the hook & loop firmly together at each corner.

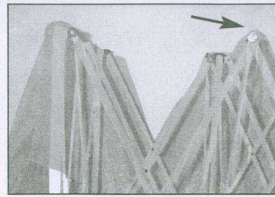


**\*4.** To secure the top to frame, line up grommet holes on valance with the bolts on frame.

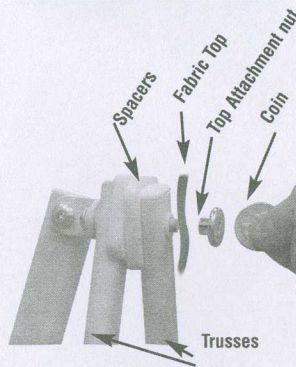



**\*5.** Unscrew top attachment nut from bolt. Place top fabric with grommets over each bolt, screw on top attachment nut and tighten until snug. Top should rotate easily - do not over-tighten. Repeat this procedure on the remaining grommets.

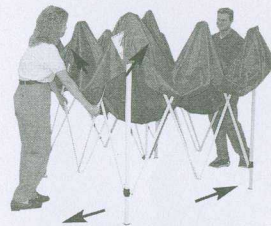

**6.** Grasp the bottom of the diamond shaped area of trusses on opposite sides by the "open" sticker. Lift up and step backwards until shelter is fully opened, being careful not to pinch fingers.

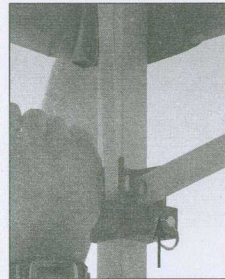


**7.** In order to engage auto slider, pull the top's hook & loop corners away from the frame as shown. Engage auto slider at each corner by pushing up on trusses while holding down on top of leg with other hand until pull pin engages. Pull down hem of top and repeat on other legs.

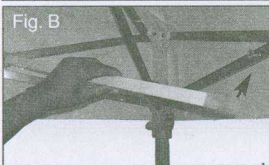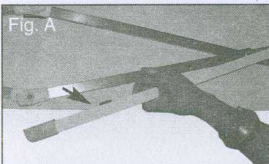

**8.** Support Arms are located near each corner of the frame (Fig A). Pull the Support Arm firmly away from the truss and mount on the opposing truss on the mounting pin (Fig B).


**Caution:** These Support Arms MUST be removed before disassembly or damage will occur.

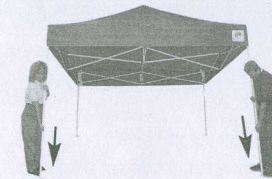


**9.** Lift two adjacent outer legs up and slide out the inner legs until the snap button locks. Repeat on the opposite legs - make sure to do two legs at a time.

**\*Note:** Once top is permanently attached, only perform steps 1 and 6 - 9 to set up.


# How To TAKE DOWN

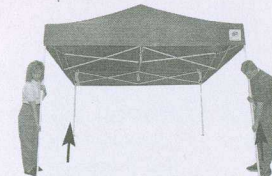


**1.** With partner, slightly lift up two adjacent outer legs 1", depress snap button and telescope inner legs into outer legs. Repeat on the opposite legs - making sure to do two legs at a time.

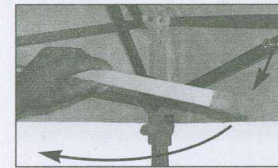

**2.** Support Arms must be removed before disassembly and secured by relocating to the opposite truss using plastic bracket.



**3.** Release the pull pin at each corner by first lifting valance of top. With one hand, push up on the truss near the pull pin; pull the pin out to release.

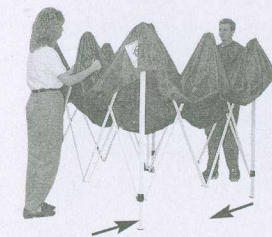

**4.** Grasp the top diamond on opposite sides by "close" sticker. Lift the shelter up slightly and shake it while stepping towards your partner until the unit is 3/4 closed. With each partner grasping two outer legs, push frame together to fully close it - **Be careful not to pinch fingers.** Store shelter in roller bag.